


SPECIFICATIONS

Type	VEHICLE MOUNTED ELEVATED WORK PLATFORM
Standard	Built to AS1418.10 (interim) 2004 ELEVATING WORK PLATFORMS
Operating height and reach	Rated height: 11.7 meters (working height: 13.2 metres) Rated reach: 8.5 metres (working reach: 9.1 metres)
Safe Work Load	250kg
Insulation Rating	66kV
Protection for operators:	Fully enclosed, insulated FRP basket with insulating liner Rated at 22kV
Upper boom fitted with	
Insulation Rating	Rated at 66kV Lower boom fitted with insulating Insert rated at 33kV Acceptance tested to 140kV

REACH DIAGRAM

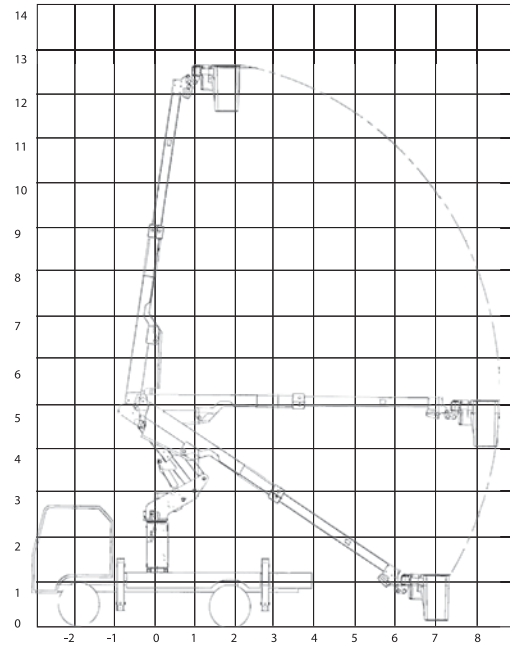

Cab Chassis	Available in 4 x 2 cab chassis of your choice Available in 4 x 4 cab chassis of your choice
Basket	Construction: Glass reinforced plastic with insulating basket line Insulated and flame retardant to ASTM D635
Basket Rotation	180 degree rotation 250 Kg SWL
Controls	Basket (main): Radio remote control panel. Operating voltage: 7.2 V dc Turret (auxiliary/emergency): manual control Back up electric emergency power supply Hydraulic tool lines to basket
Safety Controls	Back up electric emergency power supply Stabiliser and boom rest interlocks 4 x emergency stop buttons Hydraulic basket dump
Luffing	Lower boom, upper boom, telescoping boom Hydraulically operated with self-levelling system
Slewing	360 degree continuous slewing
Stabilisers	4 x hydraulically operated stabiliser legs with self-levelling foot plates comprising: 2 x fixed front legs 2 x fixed rear legs

SHERRIN
Rentals

AUSTRALIA WIDE

132 138

Fax: + 61 7 3635 4511
www.sherrinrentals.com.au



13M Electrically Tested