



## DIMENSIONAL DATA

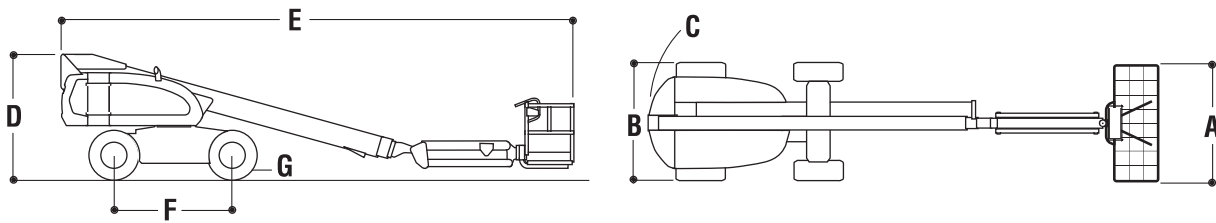

<b>A</b>	Platform Size	0.91 m x 1.83 m
<b>B</b>	Overall Width	2.44 m
<b>C</b>	Tailswing (working condition)	1.14 m
<b>D</b>	Stowed Height	2.57 m
<b>E</b>	Stowed Length	10.21 m
<b>F</b>	Wheelbase	2.46 m
<b>G</b>	Ground Clearance	12 in. (30 cm)
	Gross Vehicle Weight	12,477 kg
	Max. Ground Bearing Pressure	69 psi (4.9 kg/cm <sup>2</sup> )
	Max. Tire Load	5,986 kg

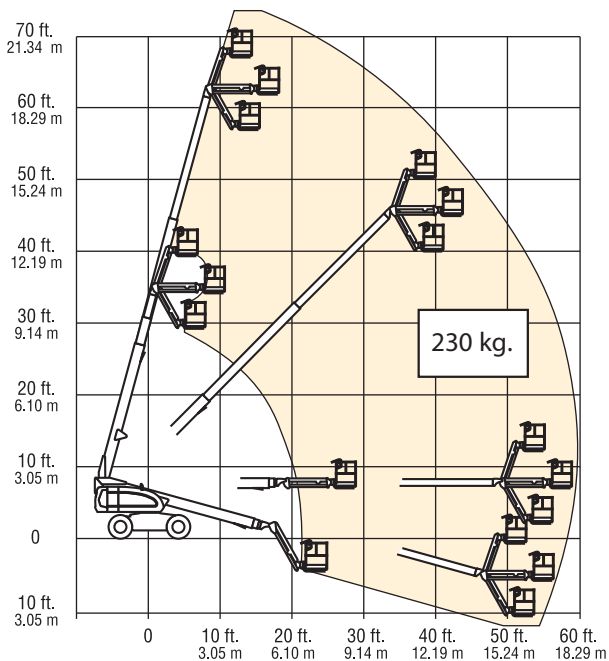

## REACH SPECIFICATIONS

Platform Height	66 ft. (20.12 m)
Horizontal Outreach	56 ft. 9 in. (17.3 m)
Swing	360 Degrees Continuous
Platform Capacity—Restricted	230 kg
Platform Capacity—Unrestricted	230 kg
Platform Rotator	180 Degrees Hydraulic
Jib (Range of Articulation)	130 Degrees (+70, -60)

## CHASSIS

Drive Speed 4WD	6.4 kph
Gradeability 4WD	45%
Tires	Lug Tread, 15 x 19.5
Axle Oscillation (optional)	20.4 cm
Turning Radius, (Inside/Outside)	
660SJ 4WS	1.65 m/3.45 m

## POWER SOURCE

Dual Fuel Engine, Ford LRG-425	82 hp (61 kW)
Diesel Engine, Deutz F4M1011E	65 hp (48.5 kW)
Fuel Tank Capacity	147.6 L
Hydraulic Reservoir	117.3 L
Auxiliary Power	12V DC

**SHERRIN**  
**Rentals**  
 AUSTRALIA WIDE  
**132 138**

Email - [info@sherrinrentals.com.au](mailto:info@sherrinrentals.com.au) Web - [www.sherrinrentals.com.au](http://www.sherrinrentals.com.au)

**66 Foot Boom Lift**