
## **SPECIFICATIONS**

Туре	VEHICLE MOUNTED
	ELEVATING WORK PLATFORM
Standard	Built to AS1418.10 (interim)
	2004 ELEVATING WORK
	PLATFORMS
Operating height and reach	Rated height: 22.5 metres
	(working height: 24 metres)
	Rated reach: 13.6 metres
	(working reach: 14.2 metres)
Safe Work Load	350 kg
Insulation rating	132 kV
Protection for operators:	Fully enclosed, insulated
	FRP basket with insulating liner.
	Rated at 22kV
	Fly boom constructed entiredly
	from GRP. Rated at 132 kV
	Lower boom fitted with insulating
	insert. Rated at 33 kV
	Acceptance tested to 275 kV

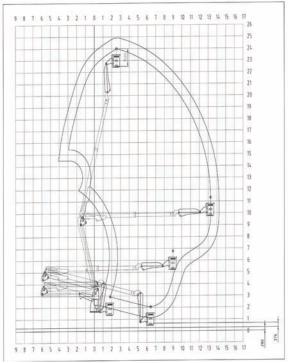

Cab Chassis	Available in 6x4 cab chassis of your choice	
Basket	·	
	Insulated and flame retardant to ASTM D635	
Basket Rotation	ket Rotation 110° rotation (55° left and 55° right)	
	350 kg SWL	
Controls	Basket(main): Radio remote control panel. Operating voltage: 7.2 V dc	
	Turret (auxiliary/emergency): manual controls	
	Back up electric emergency power supply	
Safety Controls	24v electric back up pump	
	Manual hand pump allowing full operation	
	Accumulator	
	Hydraulic basket dump	
Luffing	Lower boom, upper boom, telescoping boom, jib boom.	
	Hydraulically operated with self-levelling system	
Slewing	360° continuous slewing	
Stabilisers	4 x hydraulically operated stabiliser legs with self-levelling foot plates comprising:	
	2 x telescoping front stabiliser legs	

## SHERRIN Rentals AUSTRALIA WIDE 132 138

Fax: +61 7 3635 4511 www.sherrinrentals.com.au

