
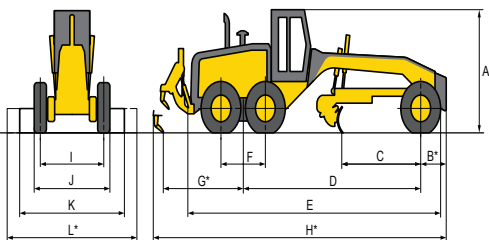


DIMENSIONAL DATA

A	Height: Low profile cab:	3.2 m
B	Center of front axle to counterweight (Pusher)	927 cm
C	Center edge to center of front axle	2.58 m
D	Wheel base to centre of tandem	6.48 m
E	Front tyre to rear bumper	11.45 m
F	Tandem wheelbase	1.524 m
G*	Center of tandem to back of ripper	2.78 m
H*	Over all length	10.575m
I	Track gauge	2.165 m
J	Width of tyres (with 17.5 x R25)	2.6 m
K	Width of moldboard (optional)	3.71 m
L*	Width of moldboard (standard)	4.32 m
M*	Ripper beam width	2.305 m
N	Articulation, left or right	25 °
	Clearance	390 cm



MOLDBOARD

Hydraulic power shift fabricated from high carbon steel. Includes replaceable metal inserts, cutting edge and end bits. Cutting edge and end bits are hardened

Dimensions	4320 x 645 x 25 mm
Arc radius	329 mm
Cutting edge	152 x 16 mm

BLADE RANGE

Circle centre shift:

Right	590 mm
Left	590 mm

Moldboard side shift:

Right	820 mm
Left	820 mm

Maximum shoulder reach outside rear tyres (frame straight):

Right	2000 mm
Left	2000 mm

Maximum lift above ground 480 mm

Maximum cutting depth 615 mm

Maximum blade angle, right or left 90 °

Blade tip angle 40 ° forward, 5 ° backward

Fuel tank 460ltr