

SHERRIN Rentals




ACCESS EQUIPMENT ■ DUMP TRUCKS ■ SKID STEERS ■ EXCAVATORS ■ EWP'S ■ WHEEL LOADERS ■ ROLLERS ■ GRADERS ■ COMPACTORS ■ WATER TRUCKS

10T Pole Borer

SPECIFICATIONS

Type	VEHICLE MOUNTED
Standard	Built to AS1418.1, AS1418.5 & AS2550.1
Lifting Capacity	Double Fall - 10.0 TONNE Single Fall - 6.0 TONNE
Maximum Hook Height	15.0 Metres
Maximum Reach	13,370mm
Boom Elevation	72 degrees above horizontal 12 degrees below horizontal
Slew	360 degrees
Winch Rope	18mm (55m)
Load Management	IFM Canbus Control System
Travelling Height	3,900mm (TYPICAL)

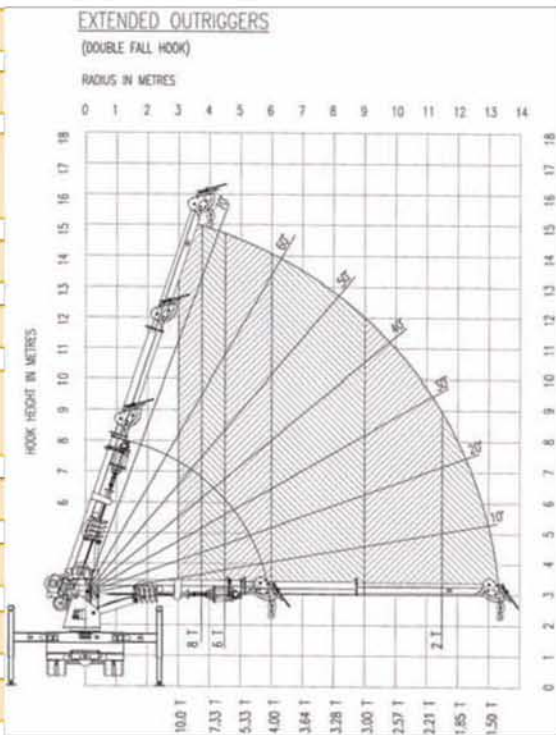

Overall Length	9,750mm (TYPICAL)
Overall Width	2,490mm
Boring Radius	Minimum - 4,855mm Maximum - 8,460mm
Auger Motor Make	Brevini
Auger Motor Type	Variable Displacement Bent Axis Piston Motor
Auger Speed (variable)	Minimum - 20 RPM @ 11,800Nm Maximum - 60 RPM @ 1,000Nm
Maximum Torque	20,000Nm
Stabilisers	4 x Hydraulically operated out and down type "Short Legging" capabilities
Hydraulic System	Variable Displacement Pump 255ltr Oil Reservoir Oil Cooler
Pole Grab	Standard

SHERRIN
Rentals

24/7 AUSTRALIA WIDE

132 138

Email: info@sherrinrentals.com.au Web: www.sherrinrentals.com.au



10t Pole Borer