



DIMENSIONAL DATA

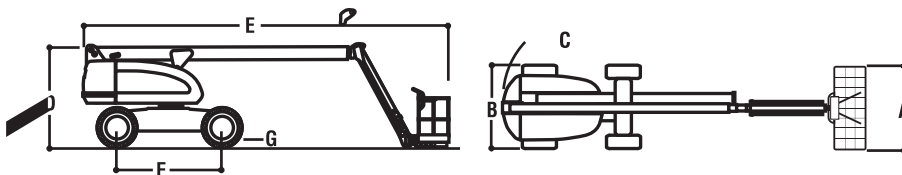

A	Platform Size	0.91 x 2.44 m
B	Overall Width	2.30 m
C	Tailswing	86 cm
D	Stowed Height	2.39 m
E	Stowed Length	7.54 m
F	Wheelbase	8.84 m
G	Ground Clearance (Standard Tires)	2.34 m
	Ground Clearance (14 x 17.5 Tires)	34 cm
	Gross Vehicle Weight	7,192 kg

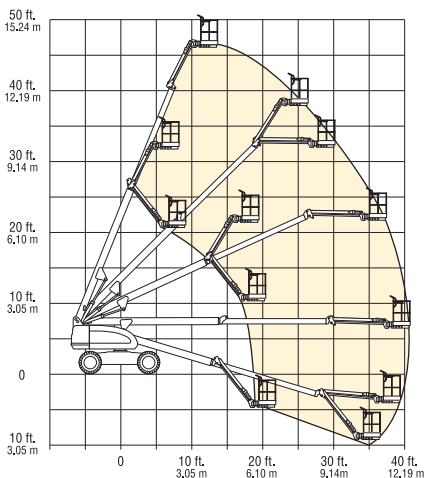

REACH SPECIFICATIONS

Platform Height	46 ft. (14.02 m)
Horizontal Outreach	40 ft. 6 in. (12.34 m)
Swing	360 Degrees Continuous
Platform Capacity- Unrestricted	230 kg
(optional)	340 kg
Platform Rotator	180 Degrees Hydraulic
Jib (Range of Articulation)	6 ft. (1.83 m), 130 Degrees (+70, -60)
Lift/Lower Speed	32/23 seconds

CHASSIS

Drive Speed 2WD/4WD	4.5 mph (7.2 kph)
Gradeability 2WD	30%
Gradeability 4WD	45%
Turning Radius (Outside)	5.0 m
Turning Radius (Inside)	2.03 m
Tire Size/Type (Standard)	12 x 16.5 Pneumatic
(optional)	14 x 17.5 Pneumatic

POWER SOURCE

Dual Fuel Engine	Ford LRG-425 EFI, 82 hp (61.1 kW)
Diesel Engine	Deutz F3M1011, 48 hp (35.8kW)
Fuel Tank Capacity	98.5 L
Hydraulic Reservoir	159 L
Auxiliary Power	12V DC
Engine Noise Level (at max. rpm)	70 dBA @ 7 meters