


CONTROL Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
Travelling and steering	Two levers with pedals
Engine throttle	Electrical, Dial type
Lights	Two lights mounted on the boom and one in the battery box

DIMENSIONS

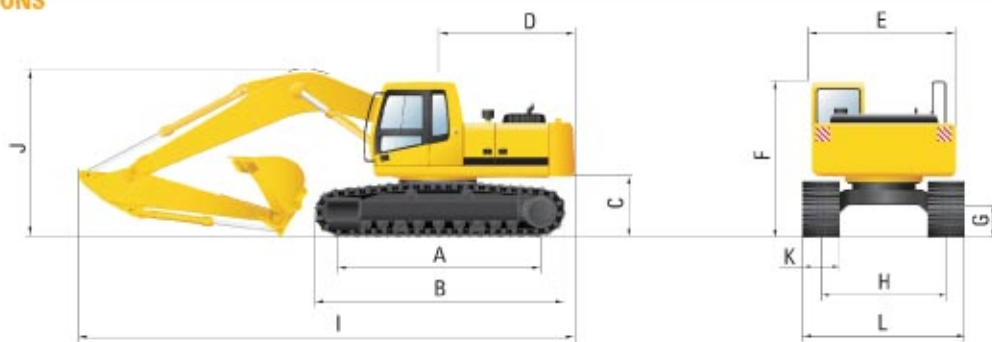

	mm		mm
H Track gauge	2390	K Track shoe width	600
I Overall length	9520	L Overall width	2990
J Overall height of boom	2990	D Tail swing	2830

SPECIFICATIONS


Diesel engine	Water-cooled
Model	Hyundai R210LC-7
Fuel tank capacity	340 litres
Hydraulic tank	180 litres
Fuel consumption rate (av. 75-85% full capacity)	15-19 litres/hour
Operating weight	21 700 kg (with std equipment)

BUCKET ATTACHMENTS

Quick hitch	Yes
Hitch pick up	330 mm
Mud	1800 mm
Trench	600 mm
Batter	1800 mm
General purpose	1100 mm
Rock hammer	Yes
Rock grab	Yes
Compaction wheel	Yes
Ripper	Yes

PERFORMANCE

Gradeability	35° / 70%
Bucket Digging Force	8.5 (9.27) (SAE) tonne
Boost	ISO 9.8 (10.69)
Ground Pressure	6.54 PSI

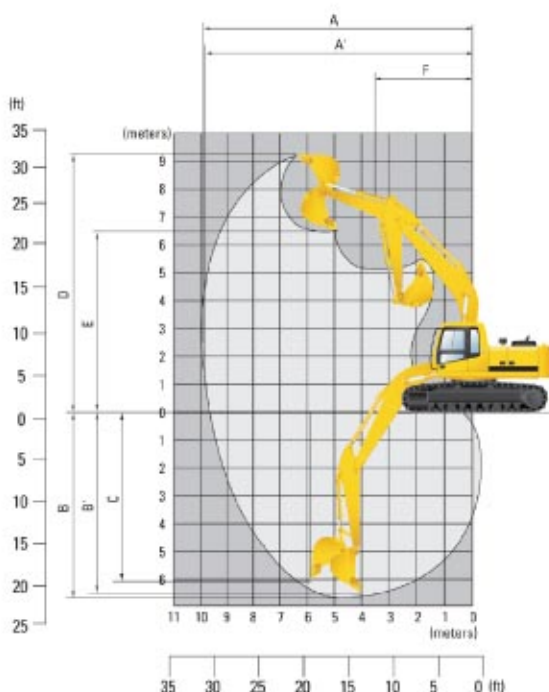

WORKING RANGES

	mm
A Max. digging reach	9940
A' Max. digging reach on ground	9780
B Max. digging depth	6740
B' Max. digging depth (8' level)	6550
C Max. vertical wall digging depth	6120
D Max. digging height	9470
E Max. dumping height	6670
F Min. swing radius	3640

SHERRIN
Rentals

BRISBANE • DARWIN • TOOWOOMBA • SUNSHINE COAST

132 138

Email - info@sherrinrentals.com.au Web - www.sherrinrentals.com.au

21 Tonne Excavator